



HAIGH CAPABILITY



Large urban sites



Smaller rural sites



Market leading
Volume reduction



A busy shop floor

Haigh Engineering based in Ross-on-Wye England, have over forty years experience of designing manufacturing and installing sewage conditioning equipment. With installations for all the major water companies in the UK, Haigh are well placed to recommend and supply screening, screenings handling, and dewatering equipment around the world.



MANUFACTURING


HAIGH



Design



Laser cutting

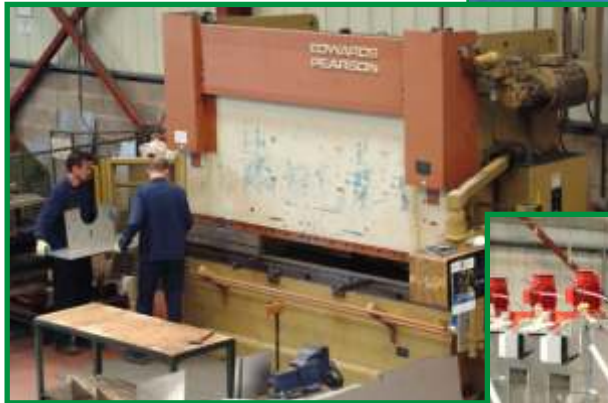

Accurate folding



Assembly



Despatch

On their four acre site Haigh have all the in house expertise and equipment to take in raw materials and manufacture high quality solutions to meet customers needs. For schemes requiring individual design input, a dedicated mechanical engineer is allocated to oversee the installation from design through to the equipment operating to the customers satisfaction.

ABBNEY MILLS



A Thames Water site designed to take storm flow screenings at up to 24 Cubic metres per hour and condition and dewater resulting solids. Flow is then directed back into a tributary of the river Thames.



Macipumps - 2 Macipump 400's on each of two 2000 package conditioning tanks. Unique launder flow grit removal before screenings enter conditioning tanks.

Liquid Separators - 2 LS403 on gantry.

LS403 feed into skip loaders with enclosed skips.

Control - Mechanical and electrical installation by Haigh.

DEEPHAM



A Thames Water site designed to take waste water screenings at up to 24 Cubic metres per hour and condition and dewater the resulting solids.



Macipumps - 4 Macipump 400's on special 2000 package integrated conditioning tank with twin grit pumps feeding Liquid Separators - 4 LS403 on clients gantry. LS403 feed into skip loaders with enclosed skips. Control - Electrical control cabinets by Haigh with mechanical and electrical installation by Haigh.

EASTBOURNE



An underground storm overflow facility on the coast, hidden away to maintain the environment for visitors to the area. Designed to take storm flow screenings and condition and dewater resulting solids. Flow is then directed back into a sea outfall.



Macipumps - 3 Macipump 302's on each of two 2000 package conditioning tanks. Unique launder flow grit removal before screenings enter conditioning tanks.

Liquid Separators - 3 LS303 on gantry with Lipactors which feed into skips.